



HEAVY DUTY SUPPORT SOCKS – DOUBLE EYE

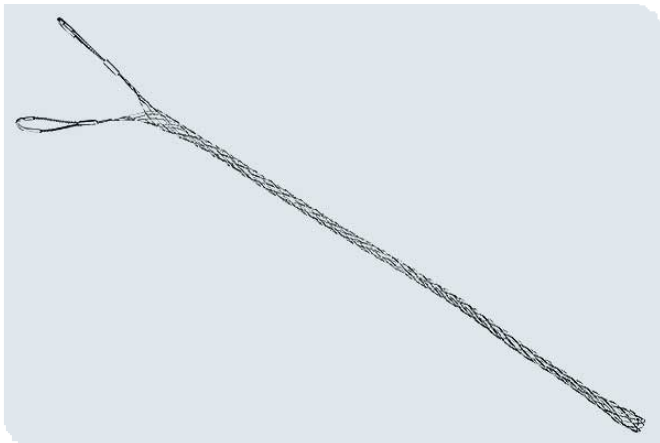

KEY FEATURES

- ✓ Made from stainless steel wire
- ✓ Designed for heavier cables
- ✓ Can support multiple cables in a bundle

Heavy Duty support socks made from stainless steel are perfect for supporting heavier cable, conduit or any other cylindrical object. Often used by Utilities and Contractors to support cables transitioning from overhead to underground. One may support multiple cables in one sock. The overall diameter of the cable bundle should fit within the listed range.

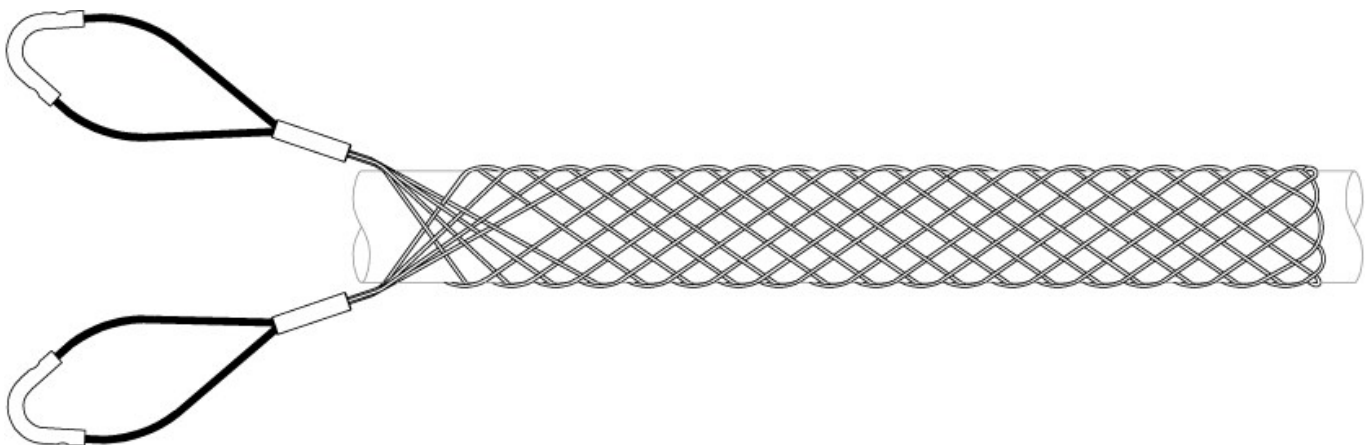

| Slingco Part No. | Range (mm) | Range (in) | Approx. Break Load (kg) | Approx. Break Load (lb) |
|------------------|------------|-------------|-------------------------|-------------------------|
| ZCS3057 | 13 - 16 | 0.50 - 0.63 | 621 | 1,370 |
| ZCS3058 | 16 - 19 | 0.63 - 0.75 | 944 | 2,080 |
| ZCS3059 | 19 - 25 | 0.75 - 1.00 | 944 | 2,080 |
| ZCS7136 | 25 - 32 | 1.00 - 1.25 | 1,211 | 2,670 |
| ZCS7137 | 31 - 38 | 1.25 - 1.50 | 2,037 | 4,490 |
| ZCS7138 | 38 - 44 | 1.50 - 1.75 | 2,037 | 4,490 |
| ZCS7139 | 44 - 50 | 1.75 - 2.00 | 2,268 | 5,000 |
| ZCS7140 | 50 - 63 | 2.00 - 2.50 | 4,056 | 8,940 |
| ZCS7141 | 63 - 76 | 2.50 - 3.00 | 4,056 | 8,940 |
| ZCS7142 | 76 - 89 | 3.00 - 3.50 | 5,445 | 12,000 |
| ZCS7143 | 89 - 102 | 3.50 - 4.00 | 5,445 | 12,000 |
| ZCS7144 | 102 - 114 | 4.00 - 4.50 | 5,445 | 12,000 |
| ZCS7145 | 114 - 127 | 4.50 - 5.00 | 5,445 | 12,000 |

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH

+61 3 8840 6556
sales@slingcoaustralia.com.au

HEAVY DUTY SUPPORT SOCKS – DOUBLE EYE

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH



+61 3 8840 6556



sales@slingcoaustralia.com.au