



# HEAVY DUTY SUPPORT SOCKS – DOUBLE EYE ROD CLOSING

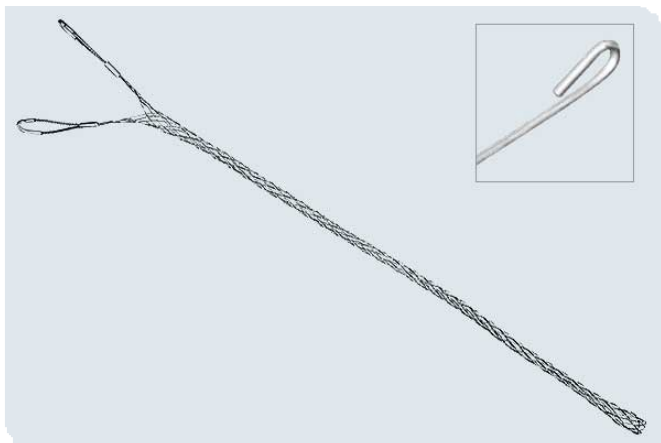

## KEY FEATURES

- ✓ Made from stainless steel wire
- ✓ Designed for heavier cables
- ✓ Can support multiple cables in a bundle
- ✓ Used when the ends of the cable(s) are not accessible

Heavy Duty support socks made from stainless steel are perfect for supporting heavier cable, conduit or any other cylindrical object. Often used by Utilities and Contractors to support cables transitioning from overhead to underground. One may support multiple cables in one sock. The overall diameter of the cable bundle should fit within the listed range.

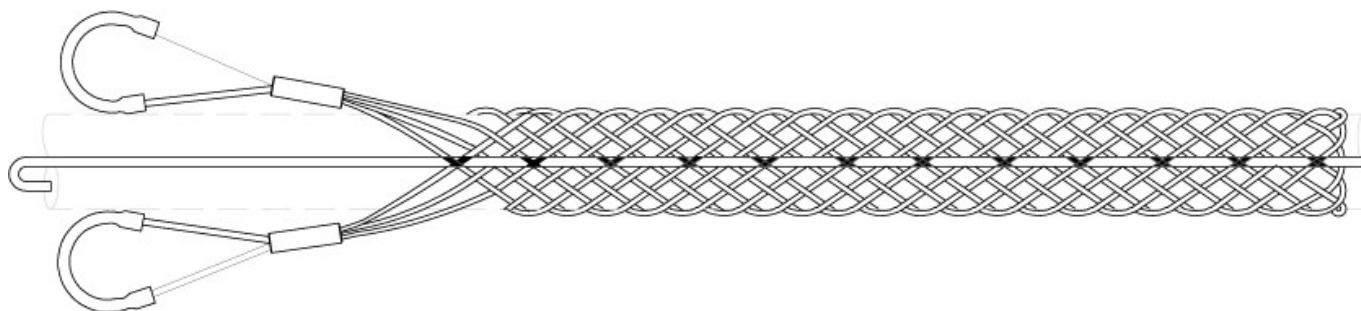

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Material	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS7098	0.50 - 0.63	13 - 16	11	304 SS	1,370	621
ZCS7099	0.63 - 0.75	16 - 19	12	304 SS	2,080	944
ZCS7100	0.75 - 1.00	19 - 25	14	304 SS	2,080	944
ZCS7101	1.00 - 1.25	25 - 32	15	304 SS	2,670	1,211
ZCS7102	1.25 - 1.50	32 - 38	16	304 SS	4,490	2,037
ZCS7103	1.50 - 1.75	38 - 44	16.5	304 SS	4,490	2,037
ZCS7104	1.75 - 2.00	44 - 51	17.5	304 SS	5,000	2,269
ZCS7105	2.00 - 2.50	51 - 63	26	304 SS	8,940	4,056
ZCS7106	2.50 - 3.00	63 - 76	25	304 SS	8,940	4,056
ZCS7107	3.00 - 3.50	76 - 87	27	304 SS	13,420	6,089
ZCS7108	3.50 - 4.00	87 - 102	36	304 SS	13,420	6,089

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd

### Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

**Range dimension overlaps** If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

## GET IN TOUCH

+61 3 8840 6556

sales@slingcoaustralia.com.au