


# HOOKED EYE CONDUIT SUPPORT CABLE SUPPORT SOCKS

## **⚠ WARNING**


Cancer and Reproductive Harm: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

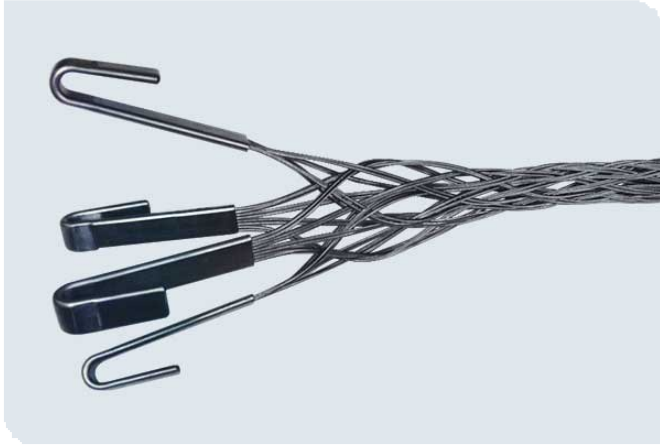

## KEY FEATURES

- ✓ Double weave lattice
- ✓ Stainless steel
- ✓ Used in outdoor riser pole applications

Heavy duty stainless steel grip for outdoor riser pole applications.

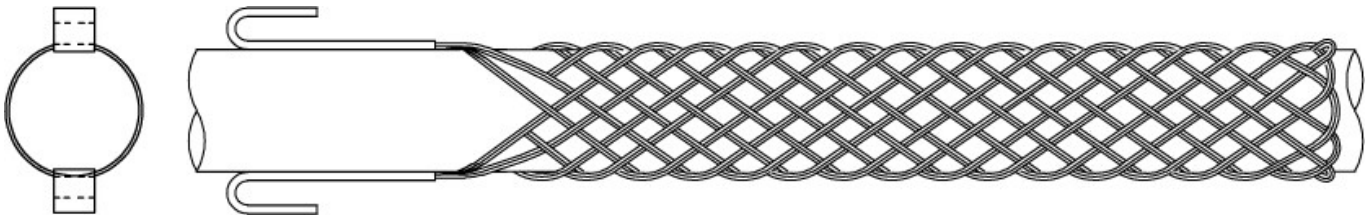

Slingco Part No.	Range (mm)	Range (in)	Lattice Weave	Lattice Length (mm)	Lattice Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS5430	57 - 70	2.25 - 2.75	Double	533	21	910	2,000
ZCS5268	82 - 95	3.25 - 3.75	Double	533	21	2,902	6,500
ZCS5062	89 - 108	3.50 - 4.25	Double	533	21	2,902	6,500
ZCS4301	102 - 114	4.0 - 4.50	Double	533	21	2,678	6,000

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd

### Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

**Range dimension overlaps** If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

## GET IN TOUCH

+61 3 8840 6556

sales@slingcoaustralia.com.au