

CONDUIT RISER CABLE SOCKS

⚠ WARNING

Cancer and Reproductive Harm: www.P65Warnings.ca.gov




KEY FEATURES

- ✓ Single weave lattice
- ✓ Designed to support electrical cabling
- ✓ Made from Stainless steel wire
- ✓ Split ring option for already installed cabling

Conduit riser socks are designed to support cables within conduit. Designed to match standard conduit sizes. These grips come in single and double weave as indicated in the table below. Also available in Split Ring design for supporting cable already installed or when the end of the cable is not available.

Call +61 (0)3 8840 6556 for additional sizes and styles.

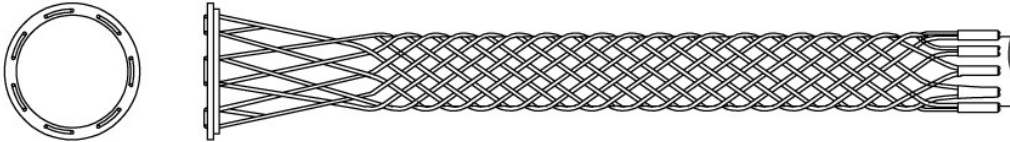

| Cable dia (in) / Length (in) | |
|------------------------------|--|
| - | 0.50-0.63 (8) 0.63-0.75 (9) 0.75-1.00 (11) 1.00-1.25 (12) 1.25-1.50 (12) 1.50-1.75 (14) 1.75-2.00 (15) (17) 2.0-2.5 (17) 2.0-3.0 (17) 2.5-3.0 (18) 2.5-3.5 (19) 3.0-3.5 (20) 3.5-4.0 (18) 3.5-4.0 (21) 3.5-4.5 (20) 4.0-4.5 (21) |
| Conduit size (in) | |
| 0.75 | ZCS2690 (530) |
| 1 | ZCS2691 (490) ZCS2694 (790) |
| 1.25 | ZCS2692 (450) ZCS2695 (740) ZCS2698 (1,030) |
| 1.5 | ZCS2696 (690) ZCS2699 (970) ZCS2701 (1,610) |
| 2 | ZCS2693 (370) ZCS2697 (640) ZCS2700 (920) ZCS2702 (1,520) ZCS2704 (1,610) |
| 2.5 | ZCS2171 (870) ZCS2705 (1,510) ZCS2707 (1,610) ZCS2708 (2,150) |
| 3 | ZCS2703 (1,340) ZCS2706 (1,400) ZCS2709 (1,490) ZCS2710 (1,990) ZCS2711 (3,260) |
| 3.5 | ZCS2714 (2,970) ZCS2716 (3,260) |
| 4 | ZCS2712 (1,670) ZCS2713 (2,680) ZCS4500* (2,722) ZCS2715 (2,890) ZCS4282 (4,080) ZCS2717 (4,080) ZCS4501* SPLIT ROD (2,722) |
| 4.5 | ZCS3709 (10,500) |
| 5 | ZCS5645* (2,150) ZCS2719 (2,150) ZCS2721 (2,860) ZCS5646* (3,130) ZCS2723 (3,130) ZCS3200* (10,000) ZCS4283 (3,080) SPLIT ROD |
| 6 | ZCS2722 (2,240) ZCS2724 (2,240) ZCS5647 (2,240) |

Note
* indicates Double Weave



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH



+61 3 8840 6556



sales@slingcoaustralia.com.au

CONDUIT RISER CABLE SOCKS

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia **Sales:** +61 3 8840 6556

GET IN TOUCH



+61 3 8840 6556



sales@slingcoaustralia.com.au