

# NO - NON-METALLIC (ARAMID) OFFSET EYE CABLE GRIP

## ⚠️ WARNING


Cancer and Reproductive Harm: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



## KEY FEATURES

- ✓ Continuous weave configuration
- ✓ No fraying wires
- ✓ Lighter and safer to handle
- ✓ Longer Life

Ideal for fibre optic, borehole cable installation, offshore or for a multitude of uses in industrial and electric cable applications; dramatically improved weight to break ratio. Slingco's non-metallic pulling grips are made of a high-strength, non-metallic aramid fibre, with UV protective coating; they are suitable for pulling both single cable and cable bundles. These woven mesh grips offer a non-metallic alternative to steel. Non-metallic material is easy to work with even without gloves.

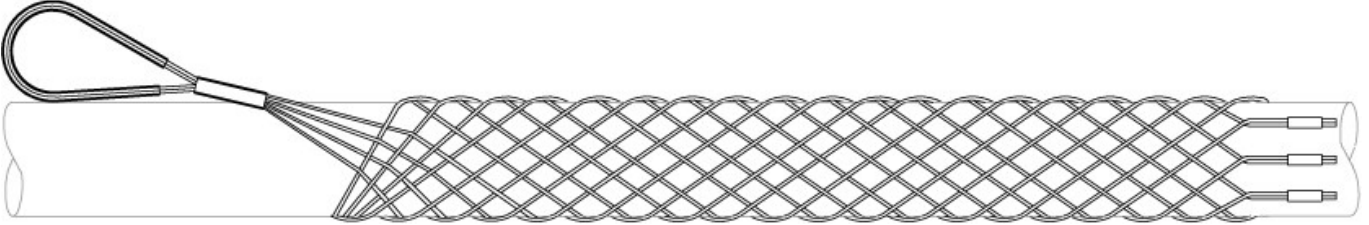

### Single Offset Eye Single Weave Non-Metallic Grip

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS2810	0.38 - 0.75	10 - 20	21	535	2,460	1,115
ZCS2811	0.75 - 1.25	20 - 30	21	535	3,580	1,620
ZCS2921	1.00 - 1.50	25 - 38	23	584	3,580	1,620
ZCS2812	1.25 - 1.50	30 - 40	25	635	4,920	2,230
ZCS2813	1.50 - 2.00	40 - 50	21	535	5,820	2,640

### Single Offset Eye Double Weave Non-Metallic Grip

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS09342	0.5 - 1.00	13 - 25	39	990	8,093	3,671
ZCS2814	1.25 - 1.50	30 - 38	34	864	9,860	4,470
ZCS2815	1.50 - 2.00	38 - 50	25	635	11,880	5,390
ZCS2816	2.00 - 2.50	50 - 65	25	635	15,900	7,210
ZCS2817	2.50 - 3.00	65 - 76	26	667	15,900	7,210
ZCS2818	3.00 - 4.00	76 - 102	34	864	15,900	7,210



## GET IN TOUCH

☎ 01706 855 558

✉ [sales@slingco.com](mailto:sales@slingco.com)

# NO - NON-METALLIC (ARAMID) OFFSET EYE CABLE GRIP

## Single Offset Eye Extended Eye 12" Non-Metallic Grip

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS7053	0.50 - 0.63	13 - 16	24	610	800	363
ZCS7054	0.63 - 0.74	16 - 19	24	610	1,000	454
ZCS7055	0.75 - 1.00	19 - 25	24	610	1,200	544
ZCS7056	1.00 - 1.25	25 - 32	24	610	1,200	544

## Single Offset Eye Lace Up Non-Metallic Grip

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS09323	0.63 - 1.00		59		13,000	
ZCS10476	3.00 - 3.50		30		5,000	

## SINGLE OFFSET EYE LACE UP NON-METALLIC GRIP

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
		65 - 76		1,499		5,896
		76 - 102		762		2,268

## Double Offset Eye Non-Metallic Grip

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS8176	2.50 - 3.00	65 - 76	39	991	8,000	3,629
ZCS09959	2.50 - 3.00	65 - 76	36	914	9,000	4,082
ZCS6823	3.00 - 4.00	76 - 102	33	838	9,000	4,082

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.

### Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

**Range dimension overlaps** If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



### GET IN TOUCH

01706 855 558

sales@slingco.com