


# HEAVY DUTY SUPPORT GRIPS – DOUBLE EYE ROD CLOSING

## ⚠ WARNING


Cancer and Reproductive Harm: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

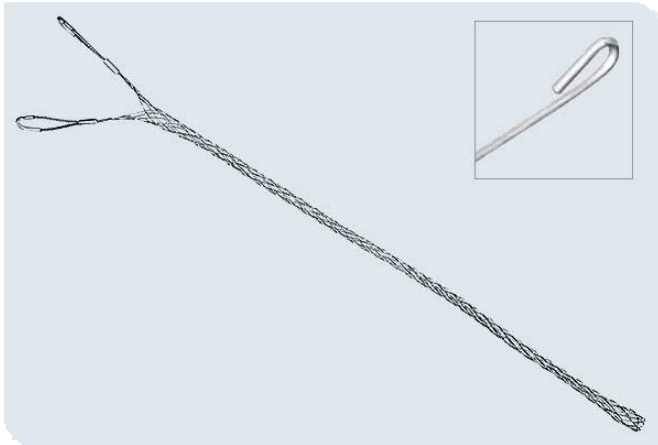

## KEY FEATURES

- ✓ Made from stainless steel wire
- ✓ Designed for heavier cables
- ✓ Can support multiple cables in a bundle
- ✓ Used when the ends of the cable(s) are not accessible

Double Eye Rod-closing Heavy Duty Support Grips made from stainless steel are perfect for supporting heavier cable, conduit or any other cylindrical object. Often used by utilities and contractors to support cables transitioning from overhead to underground. One may support multiple cables in one grip. The overall diameter of the cable bundle should fit within the listed range.

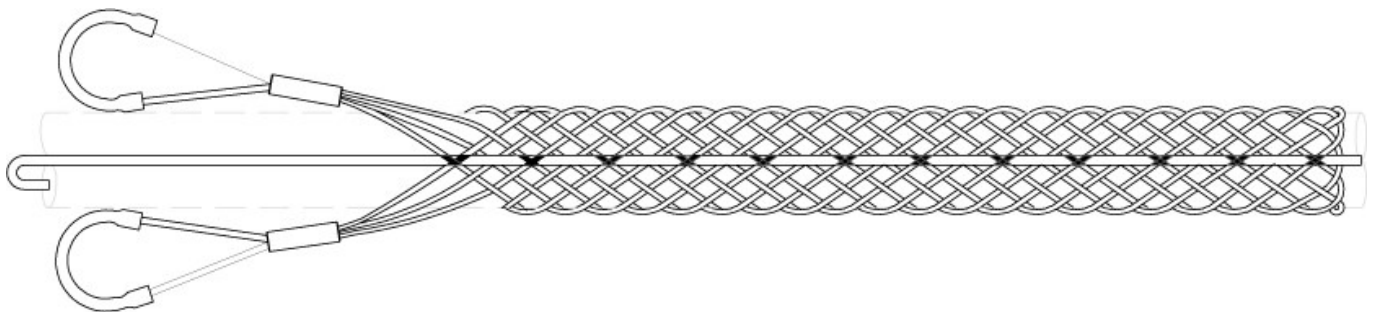

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Material	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS7098	0.50 - 0.63	13 - 16	11	304 SS	1,370	621
ZCS7099	0.63 - 0.75	16 - 19	12	304 SS	2,080	944
ZCS7100	0.75 - 1.00	19 - 25	14	304 SS	2,080	944
ZCS7101	1.00 - 1.25	25 - 32	15	304 SS	2,670	1,211
ZCS7102	1.25 - 1.50	32 - 38	16	304 SS	4,490	2,037
ZCS7103	1.50 - 1.75	38 - 44	16.5	304 SS	4,490	2,037
ZCS7104	1.75 - 2.00	44 - 51	17.5	304 SS	5,000	2,269
ZCS7105	2.00 - 2.50	51 - 63	26	304 SS	8,940	4,056
ZCS7106	2.50 - 3.00	63 - 76	25	304 SS	8,940	4,056
ZCS7107	3.00 - 3.50	76 - 87	27	304 SS	13,420	6,089
ZCS7108	3.50 - 4.00	87 - 102	36	304 SS	13,420	6,089

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



## GET IN TOUCH

01706 855 558

sales@slingco.com

# HEAVY DUTY SUPPORT GRIPS – DOUBLE EYE ROD CLOSING

## Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

**Range dimension overlaps** If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

 01706 855 558

 [sales@slingco.com](mailto:sales@slingco.com)

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558  
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478