

HEAVY DUTY SUPPORT GRIPS – SINGLE EYE LACE-UP

⚠️ WARNING


Cancer and Reproductive Harm: www.P65Warnings.ca.gov



KEY FEATURES

- ✓ Made from stainless steel wire
- ✓ Designed for heavier cables
- ✓ Can support multiple cables in a bundle
- ✓ Used when the ends of the cable(s) are not accessible

Single Eye Lace-up Heavy Duty Support Grips made from stainless steel are perfect for supporting heavier cable, conduit or any other cylindrical object. Often used by utilities and contractors to support cables transitioning from overhead to underground. One may support multiple cables in one grip. The overall diameter of the cable bundle should fit within the listed range.

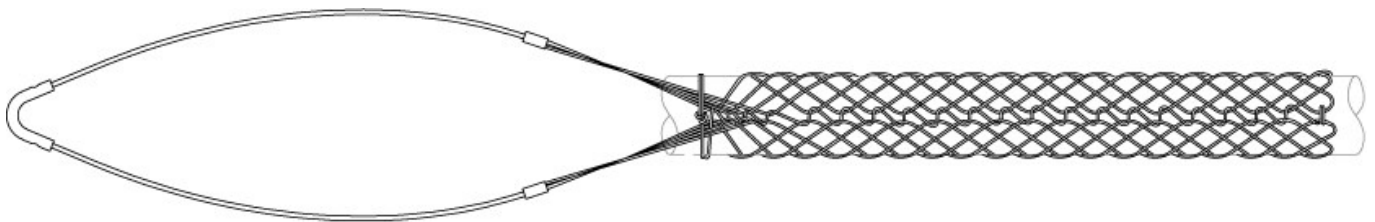

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Material	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS6907	0.50 - 0.63	13 - 16	11	316 SS	1,370	621
ZCS6908	0.63 - 0.75	16 - 19	12.5	316 SS	2,080	944
ZCS6909	0.75 - 1.00	19 - 25	12.5	316 SS	2,080	944
ZCS6910	1.00 - 1.25	25 - 32	13.5	316 SS	2,670	1,211
ZCS6911	1.25 - 1.50	32 - 38	15.5	316 SS	4,490	2,037
ZCS6912	1.50 - 1.75	38 - 44	18.5	316 SS	4,490	2,037
ZCS6913	1.75 - 2.00	44 - 51	22.5	316 SS	5,000	2,269
ZCS6914	2.00 - 2.50	51 - 63	22.5	316 SS	8,940	4,056
ZCS6915	2.50 - 3.00	63 - 76	25	316 SS	8,940	4,056
ZCS6916	3.00 - 3.50	76 - 87	28.5	316 SS	13,420	6,089
ZCS6917	3.50 - 4.00	87 - 102	28.5	316 SS	13,420	6,089

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.



GET IN TOUCH

☎ 01706 855 558

✉ sales@slingco.com

HEAVY DUTY SUPPORT GRIPS – SINGLE EYE LACE-UP

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

 01706 855 558

 sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478