

CONDUIT RISER CABLE GRIPS

⚠ WARNING


Cancer and Reproductive Harm: www.P65Warnings.ca.gov



KEY FEATURES

- ✓ Single weave lattice
- ✓ Designed to support electrical cabling
- ✓ Made from Stainless steel wire
- ✓ Split ring option for already installed cabling

A single weave grip, with a support ring, designed for the support of electrical cabling in standard rigid conduit.

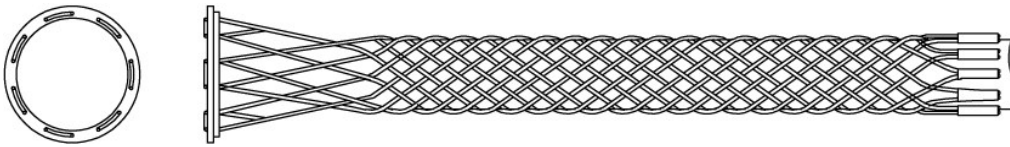

Cable dia (in) / Length (in)

Conduit size (in)	0.50-0.63 (8)	0.63-0.75 (9)	0.75-1.00 (11)	1.00-1.25 (12)	1.25-1.50 (12)	1.50-1.75 (14)	1.75-2.00 (15)	2.0-2.5 (17)	2.0-3.0 (17)	2.5-3.0 (18)	2.5-3.5 (19)	3.0-3.5 (20)	3.5-4.0 (18)	3.5-4.0 (21)	3.5-4.5 (20)	4.0-4.5 (21)
0.75	ZCS2690 (530)															
1	ZCS2691 (490)	ZCS2694 (790)														
1.25	ZCS2692 (450)	ZCS2695 (740)	ZCS2698 (1,030)													
1.5		ZCS2696 (690)	ZCS2699 (970)	ZCS2701 (1,610)												
2	ZCS2693 (370)	ZCS2697 (640)	ZCS2700 (920)	ZCS2702 (1,520)	ZCS2704 (1,610)											
2.5			ZCS2171 (870)		ZCS2705 (1,510)	ZCS2707 (1,610)	ZCS2708 (2,150)									
3				ZCS2703 (1,340)	ZCS2706 (1,400)	ZCS2709 (1,490)	ZCS2710 (1,990)	ZCS2711 (3,260)								
3.5							ZCS2714 (2,970)		ZCS2716 (3,260)							
4								ZCS2712 (1,670)	ZCS2713 (2,680)	ZCS2715 (2,890)	ZCS4282 (4,080)	ZCS2717 (4,080)				
								ZCS4500* (2,722)		ZCS4501* (2,722)	SPLIT ROD					
4.5															ZCS3709 (10,500)	
5								ZCS5645* (2,150)	ZCS2719 (2,150)		ZCS2721 (2,860)	ZCS5646* (3,130)	ZCS2723 (3,130)	ZCS3200* (10,000)	ZCS4283 (3,080)	SPLIT ROD
											ZCS4502* (2,722)					
6												ZCS2722 (2,240)	ZCS2724 (2,240)	ZCS5647 (2,240)	ZCS5648 (2,240)	

Note
* indicates Double Weave

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.



GET IN TOUCH

01706 855 558

sales@slingco.com

CONDUIT RISER CABLE GRIPS


Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

 01706 855 558

 sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478