


# DOUBLE EYE SPLIT MESH ROD CLOSING CABLE SUPPORT GRIPS

## ⚠ WARNING

Cancer and Reproductive Harm: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

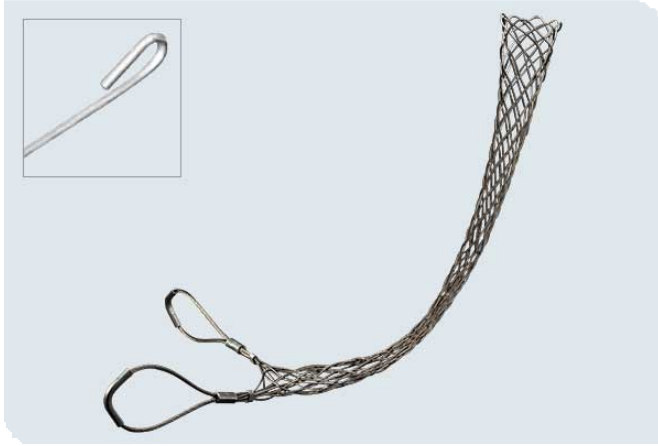

## KEY FEATURES

- ✓ Made from 304 stainless steel
- ✓ Designed for 2 connect/support points
- ✓ Use when the end of the cable is not accessible

Double eye split mesh rod closing, in 304 Stainless Steel, for secure attachment and support where the cable end is not accessible.

Slingco Part No.	Approx. Break Load (lb)	Approx. Break Load (kg)	Lattice Length (in)	Lattice Length (mm)	Lattice Material	Range (in)	Range (mm)
ZCS3009	790	355	8.5	216	304 Stainless	0.50 - 0.63	12 - 16
ZCS3010	790	355	8.5	216	304 Stainless	0.63 - 0.75	16 - 19
ZCS3011	1,020	460	10.5	266	304 Stainless	0.75 - 1.00	19 - 25
ZCS3012	1,610	730	12.5	317	304 Stainless	1.00 - 1.25	25 - 31
ZCS3013	1,610	730	14.5	368	304 Stainless	1.25 - 1.50	31 - 38
ZCS3014	1,610	730	15.5	394	304 Stainless	1.50 - 1.75	38 - 44
ZCS3015	2,150	975	16.5	419	304 Stainless	1.75 - 2.00	44 - 50
ZCS3016	3,260	1,475	19.5	495	304 Stainless	2.00 - 2.50	50 - 63
ZCS3017	3,260	1,475	21.5	546	304 Stainless	2.50 - 3.00	63 - 76
ZCS3018	5,750	2,600	23.5	597	304 Stainless	3.00 - 3.50	76 - 89
ZCS3019	5,750	2,600	25.5	648	304 Stainless	3.50 - 4.00	89 - 102

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.

### Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.



## GET IN TOUCH

☎ 01706 855 558

✉ [sales@slingco.com](mailto:sales@slingco.com)

# DOUBLE EYE SPLIT MESH ROD CLOSING CABLE SUPPORT GRIPS

**Range dimension overlaps** If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

 01706 855 558

 [sales@slingco.com](mailto:sales@slingco.com)

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558  
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478