

CABLE DRUM ROTATOR

⚠ WARNING


Cancer and Reproductive Harm: www.P65Warnings.ca.gov



KEY FEATURES

- ✓ Pressed steel construction
- ✓ Ideal for where space is limited.
- ✓ 2.36 in diameter zinc plated rollers
- ✓ Sealed roller bearings fitted
- ✓ Spring loaded shafts for easy replacement/adjustment
- ✓ Capacity 440 lb
- ✓ Max / min drum size 31.5 / 11.8 in
- ✓ Drum Width 17.72 mm
- ✓ Zinc plated finish
- ✓ Weight: 23.15 lb

This is a compact light weight Cable Drum Rotator. Drums are simply rolled up the ramp on to the adjustable rollers to allow it to spin freely.

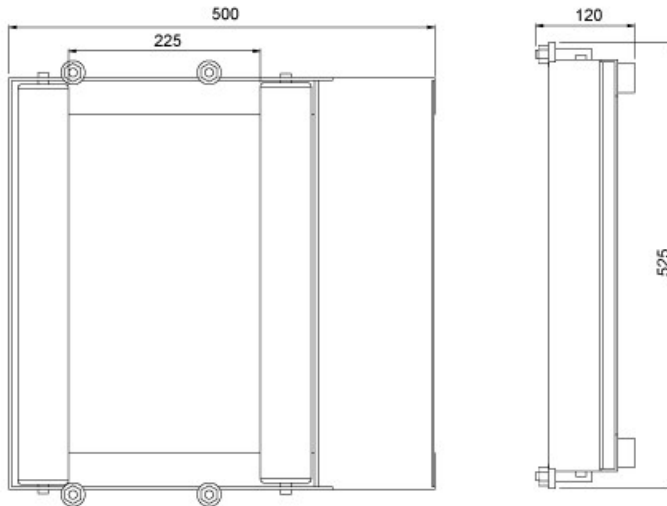

Slingco Part No.	Base Footprint (mm)	Height (mm)	Max Capacity (kg)
ZGP8267	500 x 525	120	200

Slingco Part No.	Base Footprint (in)	Height (in)	Max Capacity (lb)
ZGP8267	19.68 x 20.66	4.72	440



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH

+61 3 8840 6556
sales@slingcoaustralia.com.au

CABLE DRUM ROTATOR

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH



+61 3 8840 6556



sales@slingcoaustralia.com.au