

FLEXIBLE & THIMBLE EYE CABLE GRIPS - DOUBLE EYE

⚠ WARNING

Cancer and Reproductive Harm: www.P65Warnings.ca.gov




KEY FEATURES

- ✓ Specifically designed for metric sized cable
- ✓ Available with soft or reinforced eye
- ✓ Longer lattice length

Designed to fit the typical European range of cables, and with a longer lattice length, these grips are ideal for pulling medium to heavy loads. Made of galvanised steel.

This grip has a double eye construction allowing the cables being pulled to pass through the grip. Available with flexible eye or reinforced thimble eye.

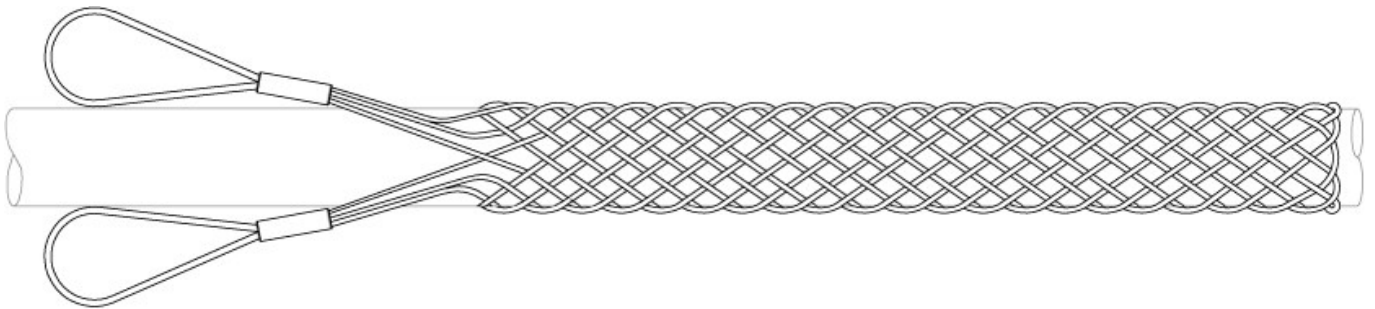

GET IN TOUCH

01706 855 558

sales@slingco.com

FLEXIBLE & THIMBLE EYE CABLE GRIPS - DOUBLE EYE

Flexible Eye	Thimble Eye	Type	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Overall Length (in)	Overall Length (mm)	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS0837	ZCS3146	Single	0.59 - 0.79	15 - 20	49	1,250	59	1,500	2,730	1,240
ZCS0838	ZCS3147	Single	0.79 - 1.18	20 - 30	49	1,250	59	1,500	3,370	1,530
ZCS0839	ZCS3148	Double	0.79 - 1.18	20 - 30	49	1,250	59	1,500	4,380	1,990
ZCS0840	ZCS3149	Single	1.18 - 1.57	30 - 40	49	1,250	59	1,500	5,620	2,550
ZCS0841	ZCS3150	Double	1.18 - 1.57	30 - 40	49	1,250	59	1,500	6,740	3,060
ZCS0842	ZCS3151	Double	1.57 - 1.97	40 - 50	59	1,500	69	1,750	13,060	5,930
ZCS0843	ZCS3152	Double	1.97 - 2.36	50 - 60	59	1,500	69	1,750	14,610	6,630
ZCS0844	ZCS3153	Double	2.36 - 2.76	60 - 70	59	1,500	69	1,750	17,160	7,790
ZCS0845	ZCS3154	Double	2.76 - 3.54	70 - 90	59	1,500	69	1,750	17,870	8,110
ZCS0847	ZCS3155	Double	3.54 - 4.33	90 - 110	59	1,500	69	1,750	26,070	11,830
ZCS0848	ZCS3156	Double	4.33 - 5.12	110 - 130	59	1,500	69	1,750	26,070	11,830
ZCS0849	ZCS3157	Double	4.72 - 5.91	120 - 150	59	1,500	69	1,750	28,100	12,750
ZCS0850	ZCS3158	Double	5.51 - 7.09	140 - 180	59	1,500	69	1,750	28,100	12,750

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

01706 855 558

sales@slingco.com