


HEAVY DUTY SUPPORT GRIPS – SINGLE EYE ROD CLOSING



KEY FEATURES

- ✓ Made from stainless steel wire
- ✓ Designed for heavier cables
- ✓ Can support multiple cables in a bundle
- ✓ Used when the ends of the cable(s) are not accessible

Heavy Duty support grips made from stainless steel are perfect for supporting heavier cable, conduit or any other cylindrical object. Often used by Utilities and Contractors to support cables transitioning from overhead to underground. One may support multiple cables in one grip. The overall diameter of the cable bundle should fit within the listed range.

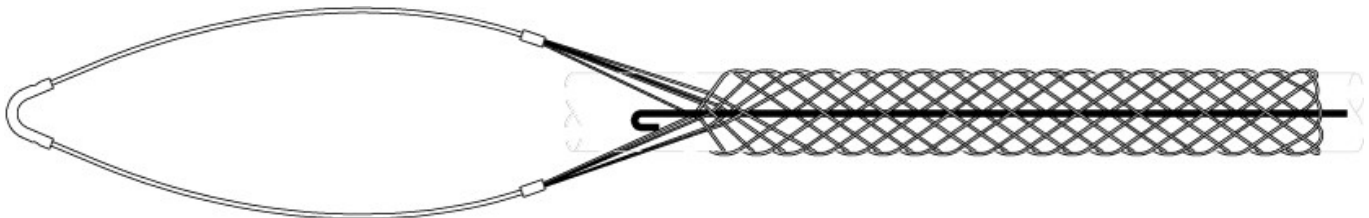

Slingco Part No.	Range (in)	Range (mm)	Lattice Length (in)	Lattice Material	Approx. Break Load (lb)	Approx. Break Load (kg)
ZCS7076	0.50 - 0.63	13 - 16	11	304 SS	1,370	621
ZCS7077	0.63 - 0.75	16 - 19	12	304 SS	2,080	944
ZCS7078	0.75 - 1.00	19 - 25	14	304 SS	2,080	944
ZCS7079	1.00 - 1.25	25 - 32	15	304 SS	2,670	1,211
ZCS7080	1.25 - 1.50	32 - 38	16.5	304 SS	4,490	2,037
ZCS7081	1.50 - 1.75	38 - 44	19.5	304 SS	4,490	2,037
ZCS7082	1.75 - 2.00	44 - 51	21	304 SS	5,000	2,269
ZCS7083	2.00 - 2.50	51 - 63	26	304 SS	8,940	4,056
ZCS7084	2.50 - 3.00	63 - 76	24.5	304 SS	8,940	4,056
ZCS7085	3.00 - 3.50	76 - 87	27	304 SS	13,420	6,089
ZCS7086	3.50 - 4.00	87 - 102	36	304 SS	13,420	6,089

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco America, Inc.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.



GET IN TOUCH



1 888 685 9478



sales@slingcoamerica.com

HEAVY DUTY SUPPORT GRIPS – SINGLE EYE ROD CLOSING

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

 1 888 685 9478

 sales@slingcoamerica.com