


BUS DROP GRIPS



KEY FEATURES

- ✓ Lightweight application
- ✓ Reduces strain on electrical connections
- ✓ Available in Galvanized or Stainless Steel Wire

Lightweight easy to use Bus Drop Grips are perfect for supporting cables in such applications as data centres, control centres and other wiring-to-rack applications. Available in Galvanized or Stainless Steel.

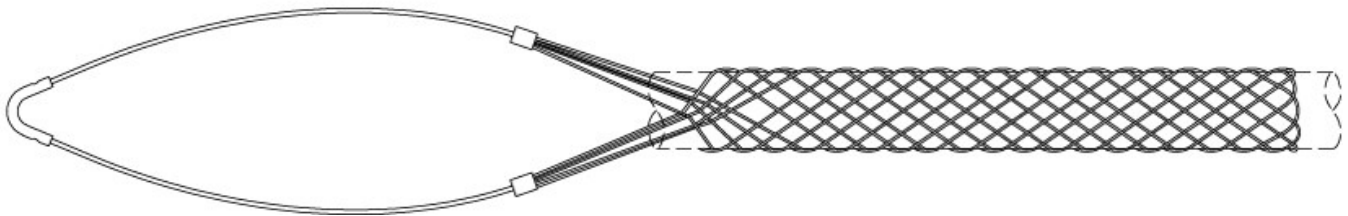

GET IN TOUCH



1 888 685 9478



sales@slingcoamerica.com

BUS DROP GRIPS

Slingco Part No.	Range (in)	Range (mm)	Wire Material	Eye Length (mm)	Eye length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS6969	0.22 - 0.32	6.1 - 8.1	Galvanized	88.9	3.5	158	350
ZCS6970	0.30 - 0.43	8.1 - 10.9	Galvanized	101.6	4	204	450
ZCS6971	0.41 - 0.56	10.9 - 14.2	Galvanized	120.6	4.75	249	550
ZCS6972	0.53 - 0.73	14.2 - 18.5	Galvanized	152.4	6	453	1,000
ZCS6973	0.70 - 0.85	18.5 - 21.6	Galvanized	171.4	6.75	635	1,400
ZCS6974	0.82 - 1.00	21.6 - 25.4	Galvanized	203.2	8	635	1,400
ZCS6975	0.96 - 1.25	25.4 - 31.7	Galvanized	241.3	9.5	680	1,500
ZCS09744	0.22 - 0.32	6.1 - 8.1	304 Stainless Steel	88.9	3.5	45.36	100
ZCS09745	0.30 - 0.43	8.1 - 10.9	304 Stainless Steel	101.6	4	117.9	260
ZCS09746	0.41 - 0.56	10.9 - 14.2	304 Stainless Steel	120.6	4.75	249	550
ZCS09717	0.53 - 0.73	14.2 - 18.5	304 Stainless Steel	152.4	6	453	1,000
ZCS09747	0.70 - 0.85	18.5 - 21.6	304 Stainless Steel	171.4	6.75	635	1,400
ZCS09748	0.82 - 1.00	21.6 - 25.4	304 Stainless Steel	203.2	8.0	635	1,400
ZCS09749	0.96 - 1.25	25.4 - 31.7	304 Stainless Steel	241.3	9.5	680	1,400
ZCS09968	0.41 - 0.56	10.9 - 14.2	ALL 316 Stainless Steel	120.6	4.75	249	550
ZCS09969	0.53 - 0.73	14.2 - 18.5	ALL 316 Stainless Steel	152.4	6	453	1,000
ZCS10400	0.70 - 0.85	18.5 - 21.6	ALL 316 Stainless Steel	171.4	6.75	635	1,400
ZCS10401	0.82 - 1.00	21.6 - 25.4	ALL 316 Stainless Steel	203.2	8.0	635	1,400

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco America, Inc.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

1 888 685 9478

sales@slingcoamerica.com