


OFFSET EYE CLOSED MESH CABLE SUPPORT GRIPS

⚠ WARNING

Cancer and Reproductive Harm: www.P65Warnings.ca.gov

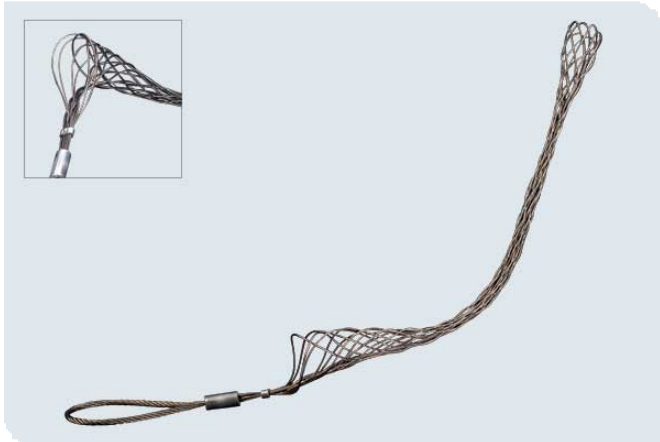

KEY FEATURES

- ✓ Made from 304 stainless steel
- ✓ Supports cable in vertical or horizontal mode

This offset eye grip, in 304 Stainless Steel, is designed to support cable as it hangs vertically or horizontally when the end of the cable is available.

Slingco Part No.	Approx. Break Load (lb)	Approx. Break Load (kg)	Lattice Length (in)	Lattice Length (mm)	Range (in)	Range (mm)
ZCS1915	512	230	9.7	247	0.50 - 0.63	12 - 16
ZCS1916	740	335	9.7	247	0.63 - 0.75	16 - 19
ZCS1917	1,000	450	13	331	0.75 - 1.00	19 - 25
ZCS1918	1,540	695	13.5	344	1.00 - 1.25	25 - 31
ZCS1919	1,540	695	15	382	1.25 - 1.50	31 - 38
ZCS1920	2,010	910	16.5	420	1.50 - 1.75	38 - 44
ZCS1921	2,010	910	20	509	1.75 - 2.00	44 - 50
ZCS1922	3,230	1,465	21	535	2.00 - 2.50	50 - 63
ZCS1923	4,000	1,815	24	611	2.50 - 3.00	63 - 76
ZCS1924	4,000	1,815	26	662	3.00 - 3.50	76 - 89
ZCS1925	4,000	1,815	29	738	3.50 - 4.00	89 - 102
ZCS6408	4,000	1,815	28	711	4.00 - 4.50	102 - 114
ZCS6409	4,000	1,815	28	711	4.50 - 5.00	114 - 127
ZCS6410	4,000	1,815	28	711	5.00 - 5.50	127 - 140

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco America, Inc.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.



GET IN TOUCH

☎ 1 888 685 9478
✉ sales@slingcoamerica.com

OFFSET EYE CLOSED MESH CABLE SUPPORT GRIPS

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

 1 888 685 9478

 sales@slingcoamerica.com