


OE TYPE - OPEN ENDED CABLE SPLICING GRIP



KEY FEATURES

- ✓ Available in galvanized steel or stainless steel
- ✓ Single, double triple weave configuration
- ✓ Range from 10mm - 140mm

Ideal for joining two cables to form a continuous loop. Typical application: replacement of lift cables, where the old cable would be attached to the new one, and the cable then fed around with ease. Also used to temporarily splice cable and conductor where torsion forces are NOT an issue. Torsion should be released prior to splicing. Where torsion is present a swivel and two grips should be used.

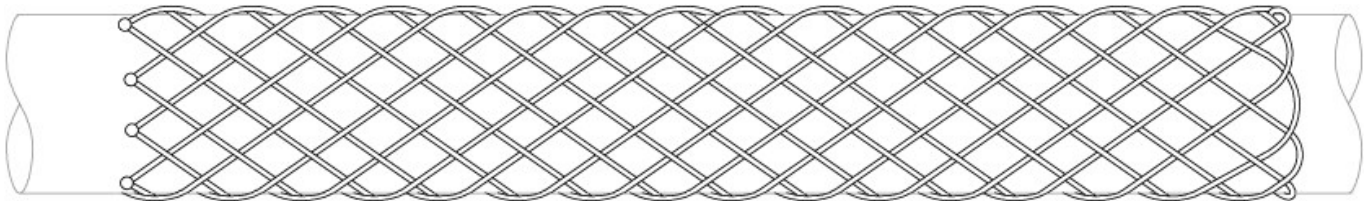

GET IN TOUCH



1 888 685 9478



sales@slingcoamerica.com



OE TYPE - OPEN ENDED CABLE SPLICING GRIP

Open Ended Standard Grip - Galvanized

| Slingco Part No. | Range (mm) | Range (in) | Lattice Weave | Lattice Length (mm) | Lattice Length (in) | Approx. Break Load (kg) | Approx. Break Load (lb) |
|------------------|------------|-------------|---------------|---------------------|---------------------|-------------------------|-------------------------|
| ZCS0313 | 6 - 13 | 0.25 - 0.50 | Single | 380 | 15 | 760 | 1,680 |
| ZCS6420 | 6 - 13 | 0.25 - 0.50 | Double | 559 | 22 | 1,588 | 3,500 |
| ZCS0314 | 13 - 19 | 0.50 - 0.75 | Single | 610 | 24 | 1,015 | 2,240 |
| ZCS6421 | 13 - 19 | 0.50 - 0.75 | Double | 762 | 30 | 1,815 | 4,000 |
| ZCS6425 | 13 - 19 | 0.50 - 0.75 | Multi | 1,779 | 70 | 3,400 | 7,500 |
| ZCS0315 | 19 - 25 | 0.75 - 1.00 | Single | 710 | 28 | 2,540 | 5,600 |
| ZCS6422 | 19 - 25 | 0.75 - 1.00 | Triple | 762 | 30 | 3,630 | 8,000 |
| ZCS6426 | 19 - 25 | 0.75 - 1.00 | Multi | 2,032 | 80 | 5,352 | 11,800 |
| ZCS0316 | 25 - 38 | 1.00 - 1.50 | Single | 815 | 32 | 3,555 | 7,840 |
| ZCS6423 | 25 - 38 | 1.00 - 1.50 | Double | 915 | 36 | 4,537 | 10,000 |
| ZCS6427 | 25 - 38 | 1.00 - 1.50 | Multi | 2,285 | 90 | 9,070 | 20,000 |
| ZCS0317 | 38 - 50 | 1.50 - 2.00 | Double | 915 | 36 | 5,080 | 11,200 |
| ZCS0318 | 50 - 63 | 2.00 - 2.50 | Double | 1,065 | 42 | 5,080 | 11,200 |
| ZCS1158 | 63 - 89 | 2.50 - 3.50 | Double | 1,220 | 48 | 6,095 | 13,440 |
| ZCS1159 | 89 - 115 | 3.50 - 4.50 | Double | 1,370 | 54 | 7,110 | 15,680 |
| ZCS6424 | 108 - 124 | 4.25 - 4.88 | Triple | 1,400 | 55 | 8,847 | 19,500 |
| ZCS1975 | 115 - 140 | 4.50 - 5.50 | Double | 1,370 | 54 | 7,110 | 15,680 |



GET IN TOUCH

 1 888 685 9478
 sales@slingcoamerica.com

OE TYPE - OPEN ENDED CABLE SPLICING GRIP

Open Ended Standard Grip - 316 Stainless Steel

| Slingco Part No. | Range (mm) | Range (in) | Lattice Weave | Lattice Length (mm) | Lattice Length (in) | Approx. Break Load (kg) | Approx. Break Load (lb) |
|------------------|------------|-------------|---------------|---------------------|---------------------|-------------------------|-------------------------|
| ZCS1995 | 6 - 13 | 0.25 - 0.50 | Single | 380 | 15 | 610 | 1,344 |
| ZCS1996 | 13 - 19 | 0.50 - 0.75 | Single | 610 | 24 | 810 | 1,792 |
| ZCS1997 | 19 - 25 | 0.75 - 1.00 | Single | 710 | 28 | 2,030 | 4,480 |
| ZCS1998 | 25 - 38 | 1.00 - 1.50 | Single | 815 | 32 | 2,845 | 6,272 |
| ZCS1999 | 38 - 50 | 1.50 - 2.00 | Double | 915 | 36 | 4,065 | 8,960 |
| ZCS2000 | 50 - 63 | 2.00 - 2.50 | Double | 1,065 | 42 | 4,065 | 8,960 |
| ZCS2001 | 63 - 89 | 2.50 - 3.50 | Double | 1,220 | 48 | 4,875 | 10,752 |
| ZCS2002 | 89 - 115 | 3.50 - 4.50 | Double | 1,370 | 54 | 5,690 | 12,544 |
| ZCS2003 | 115 - 140 | 4.50 - 5.50 | Double | 1,370 | 54 | 5,690 | 12,544 |
| ZCS11923 | 165 - 191 | 6.50 - 7.50 | Double | 3,048 | 120 | 5,690 | 12,544 |

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco America, Inc.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

1 888 685 9478

sales@slingcoamerica.com