



Grounding Clamps

Providing safe and effective grounding connections



Grounding Clamps





Providing safe and effective grounding connections


Slingco's grounding clamps meet ASTM F855 and have a maximum line range of up to 2" (50.8mm) which allows them to be used in a wide variety of grounding applications.

- ✓ Meets ASTM F855 specification
- ✓ Line range up to 2" (50.8 mm)
- ✓ Adjustable to ensure secure connection between clamp and cable


ALUMINUM CLAMPS

Slingco's aluminum grounding clamps have a location for a grounding stud which allows for a wide variety of grounding applications. The Slingco aluminum clamps come with serrated and a smooth jaw offering.

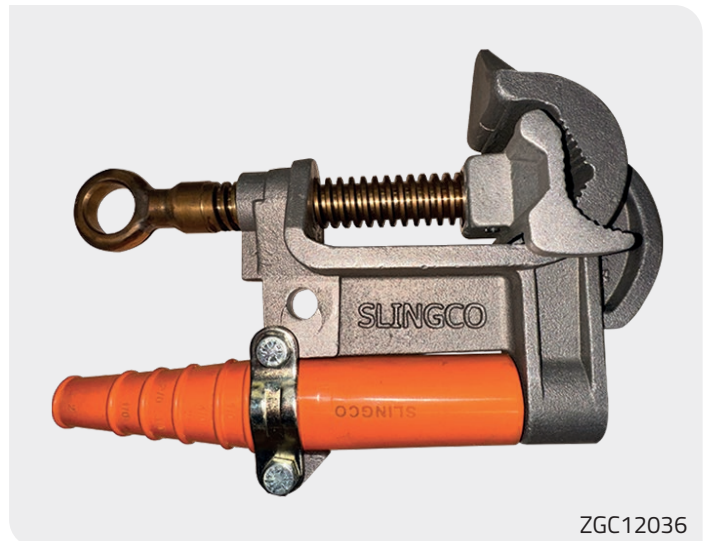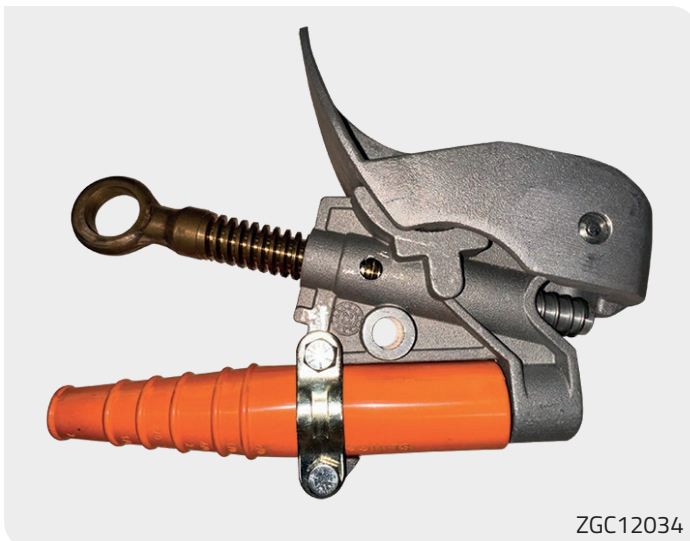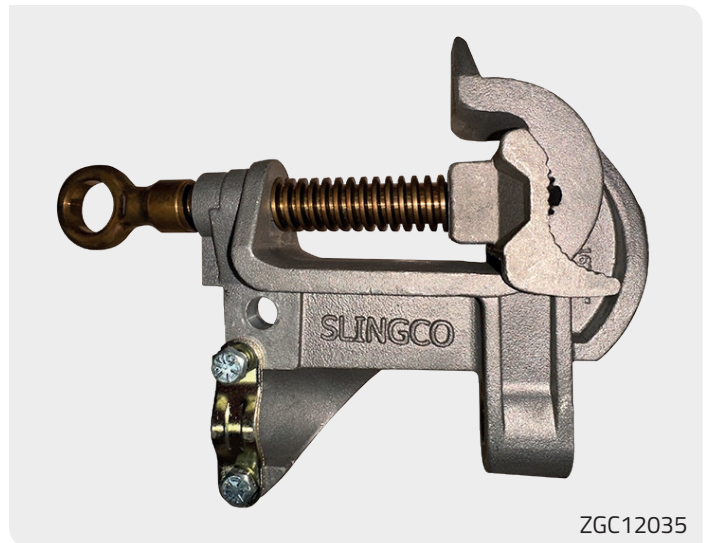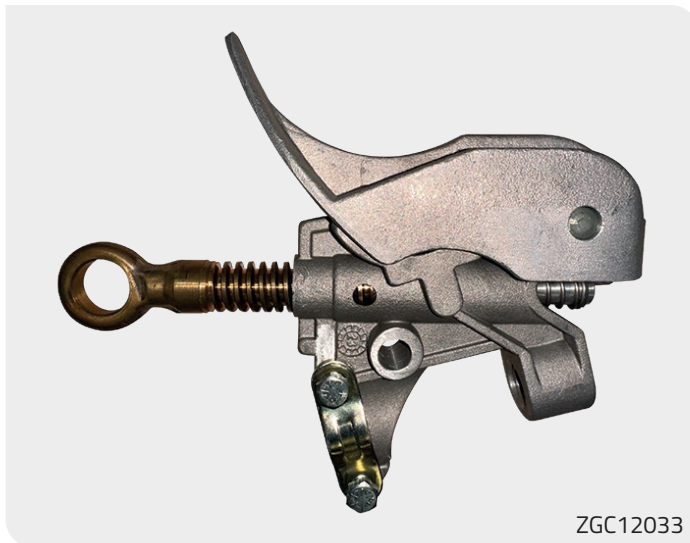

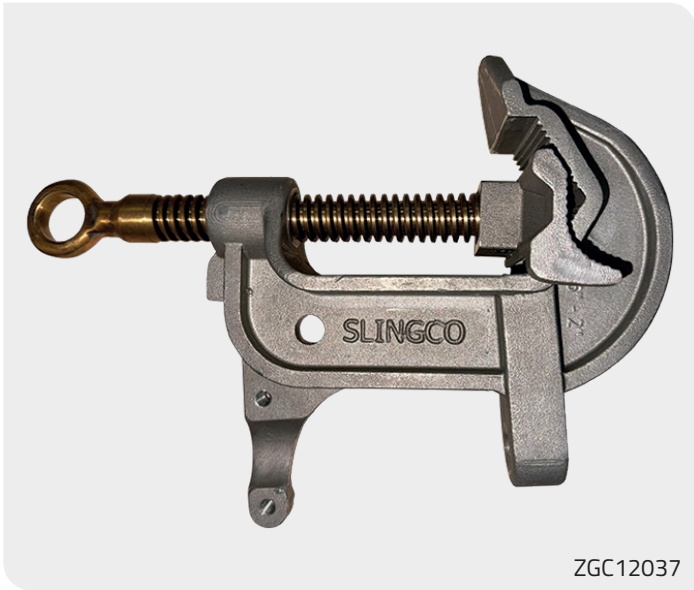


ZGC12037

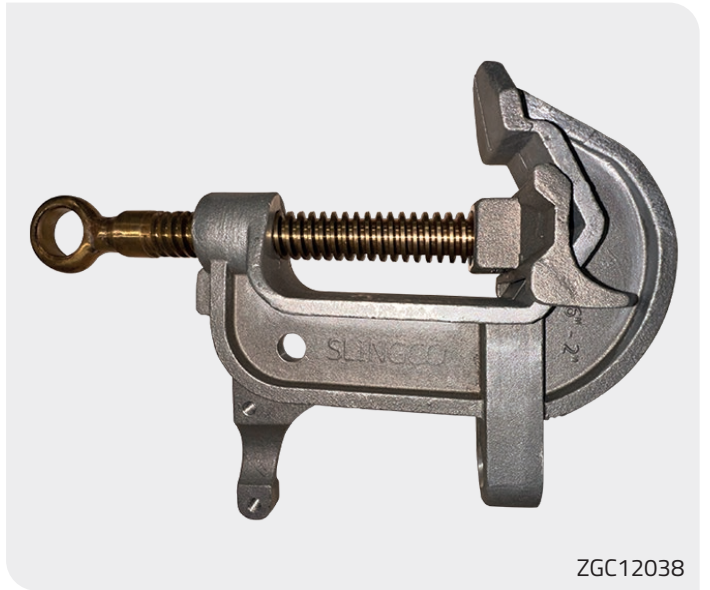


ZGC12038

BRONZE CLAMPS

Slingco's bronze grounding clamps have set screws in the moveable jaw which allows the user to adjust and make sure there is a secure connection between the clamp and cable. The flat face clamps come with a serrated jaw and are available with a T-handle or Eye Bolt.

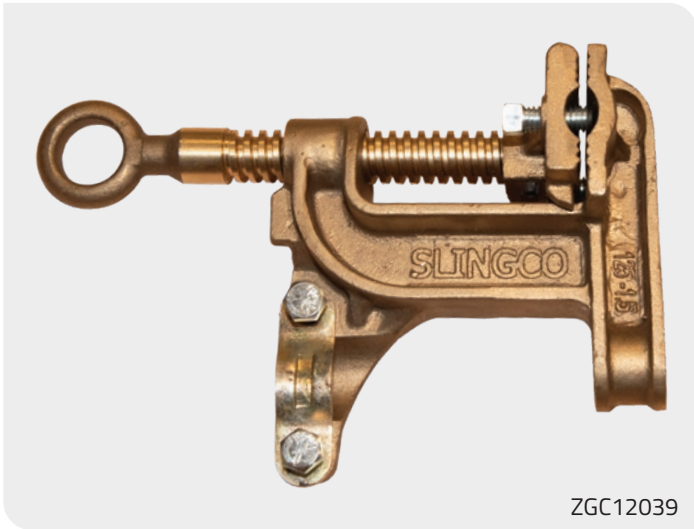

ZGC12039

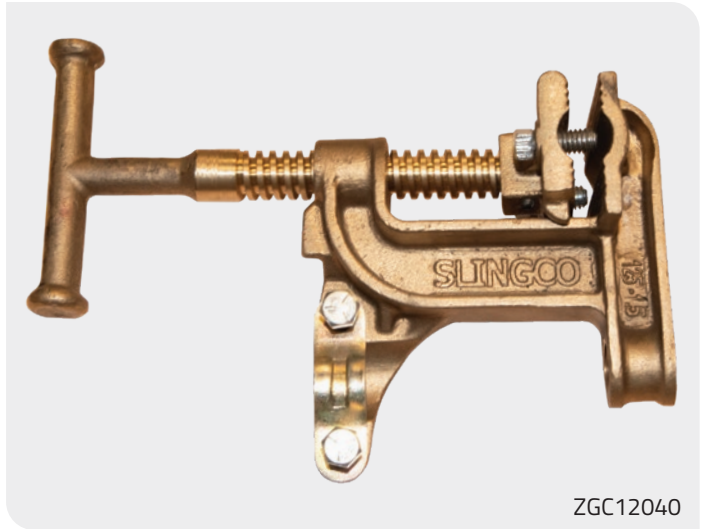

ZGC12040

Slingco Part no.	Description	Clamp Material	Eye Type	Class/ASTM Grade	Line Range		Weight	
					in	mm	lb	kg
ZGC12033	Duckbill Clamp w/o Strain Relief	Aluminum	Eye Bolt	Class B/Grade 5H	0.16-1.66	4.06-42.16	1.85	0.84
ZGC12034	Duckbill Clamp w/ Strain Relief	Aluminum	Eye Bolt	Class B/Grade 5H	0.16-1.66	4.06-42.16	1.98	0.90
ZGC12035	1.5" (38 mm) C-Clamp w/o Strain Relief	Aluminum	Eye Bolt	Class B/Grade 5	0.16-1.50	4.06-38.10	1.85	0.84
ZGC12036	1.5" (38 mm) C-Clamp w/ Strain Relief	Aluminum	Eye Bolt	Class B/Grade 5	0.16-1.50	4.06-38.10	1.98	0.90
ZGC12037	2" (51 mm) C-Clamp w/ Serrated Jaw	Aluminum	Eye Bolt	Class B/Grade 5H	0.16-2.00	4.06-50.80	2.25	1.02
ZGC12038	2" (51 mm) C-Clamp w/ Smooth Jaw	Aluminum	Eye Bolt	Class A/Grade 5H	0.16-2.00	4.06-50.80	2.20	1.00
ZGC12039	1.5" (38 mm) Flat Face Grounding	Bronze	Eye Bolt	Class B/Grade 5	0.125-1.50	3.18-38.10	1.98	0.90
ZGC12040	1.5" (38 mm) Flat Face Grounding	Bronze	T Handle	Class B/Grade 5	0.125-1.50	3.18-38.10	2.16	0.98





Slingco America, Inc.

3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA

TOLL FREE: 888 685 9478 · sales@slingcoamerica.com

For any inquiries call or visit
888 685 9478 | [slingco.com](https://www.slingco.com)

Slingco makes no warranty, express or implied, with respect to this product nor with respect to its specifications. In no event shall Slingco be liable for any direct, indirect, punitive, incidental, special consequential damages to property or life, whatsoever, arising out of or connected with the use or misuse of this product. This product is intended for use by qualified professionals having adequate knowledge of its proper use. December 2025 - v1.4